



Legal requirements for acceptance and control during operation of landfills



“Information Exchange Event on landfill of Waste“

Bulgaria, 13 November 2008



Basic requirements for landfill of waste

Waste may only be landfilled if compatible with the standards set for each landfill class!

- (1) Procedure for the acceptance of waste at landfills (Article 1 / Annex I)
 - (2) Waste acceptance criteria (Article 2 / Annex II)
 - (3) Sampling and test methods (Article 3 / Annex III)

To be applied since July 2005



Procedure for the acceptance of waste at landfills

1. Basic
characterisation of
waste


2. Compliance testing

3. On-site verification

Records of information
obtained have to be kept
for a period to be defined
by MS



Decision 2003/33/EC – Acceptance Procedures

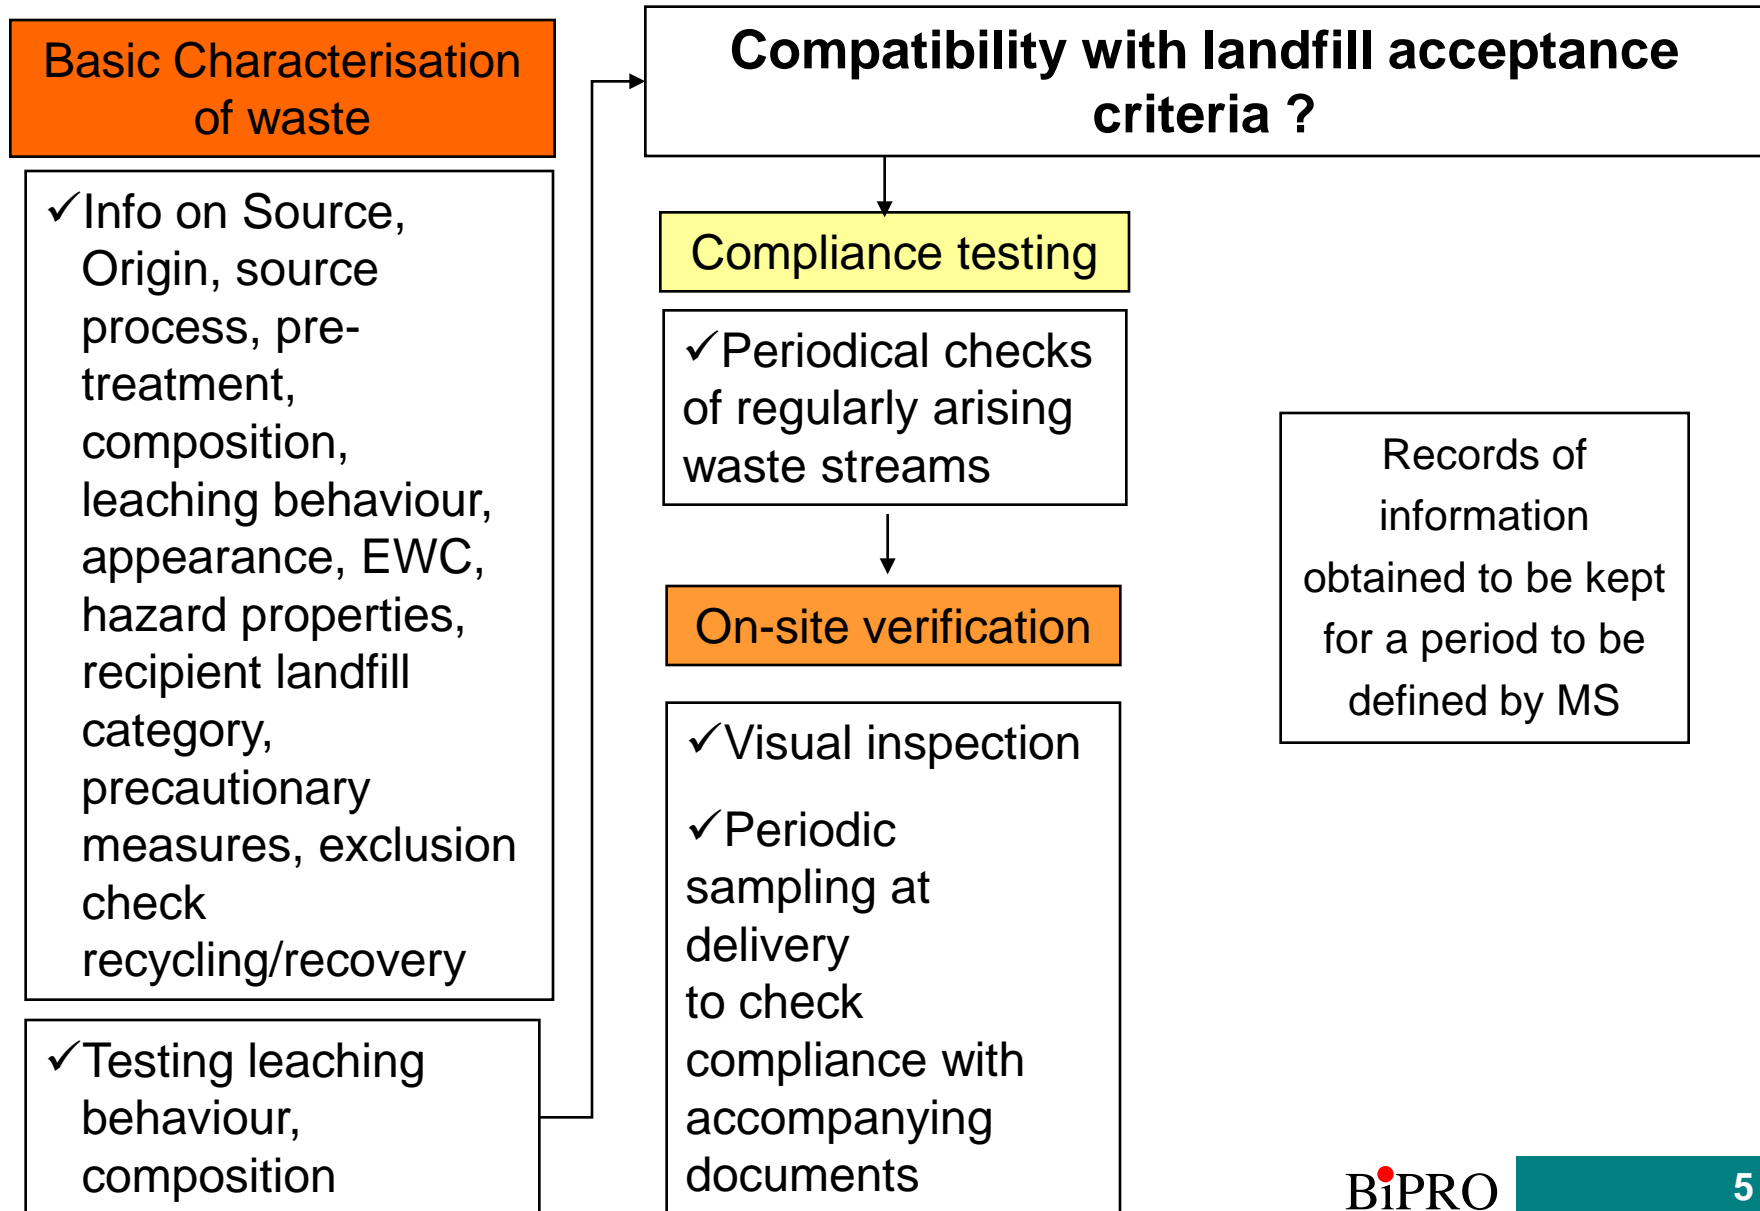

Acceptance procedure – basic characterisation

Basic characterisation

1. info on source and origin
2. source process
3. pre-treatment
4. composition
5. leaching behaviour
6. hazard properties
7. appearance
8. EWC,
9. recipient landfill category
10. precautionary measures
11. exclusion check recycling/recovery

- Task of waste producer
Definition of **key variables**
- Full characterisation of waste; required for each type of waste

Chemical analysis

Compatibility with landfill acceptance criteria ?

yes


Waste is deemed to be acceptable at landfill class

no

Waste is not acceptable at landfill class



Acceptance procedure – compliance testing

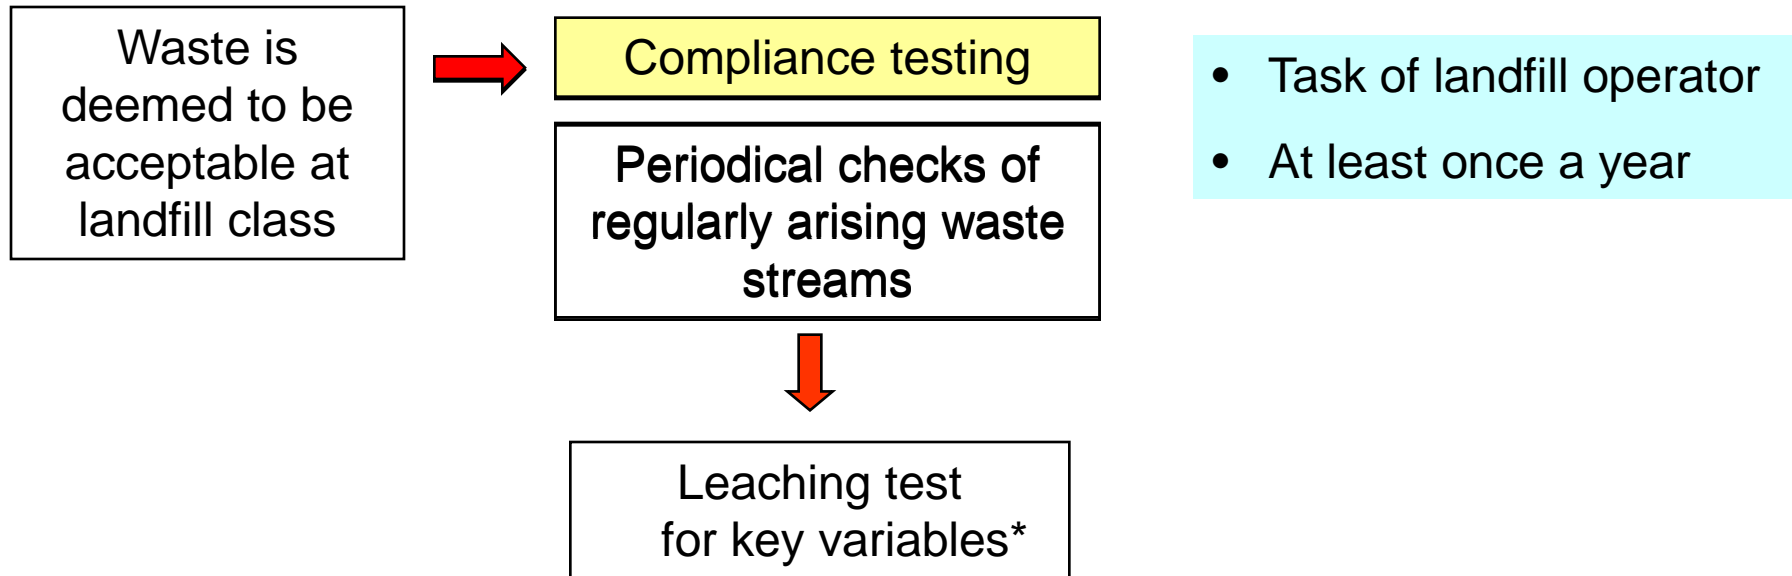

Tests methods as used for basic characterisation shall be applied
(* = critical parameters as identified during basic characterisation)



Acceptance of waste at landfills – procedures in relation to waste characterisation

Wastes that are regularly generated in the same process

- Installation and process are well known
- Input materials and process are well defined
- Single installation or processes well known (e.g. incineration ashes)

Producer has to inform on changes



After one basic characterisation subsequently compliance testing of key variables may be sufficient


The basic characterisation then should especially contain the **compositional range** for the individual wastes and the **range and variability for characteristic properties**



Acceptance of waste at landfills – procedures in relation to waste characterisation


**Wastes that are not regularly
generated**

➤ Not part of a well characterised
waste stream



Basic characterisation for
each batch of waste

Acceptance procedure – on-site verification

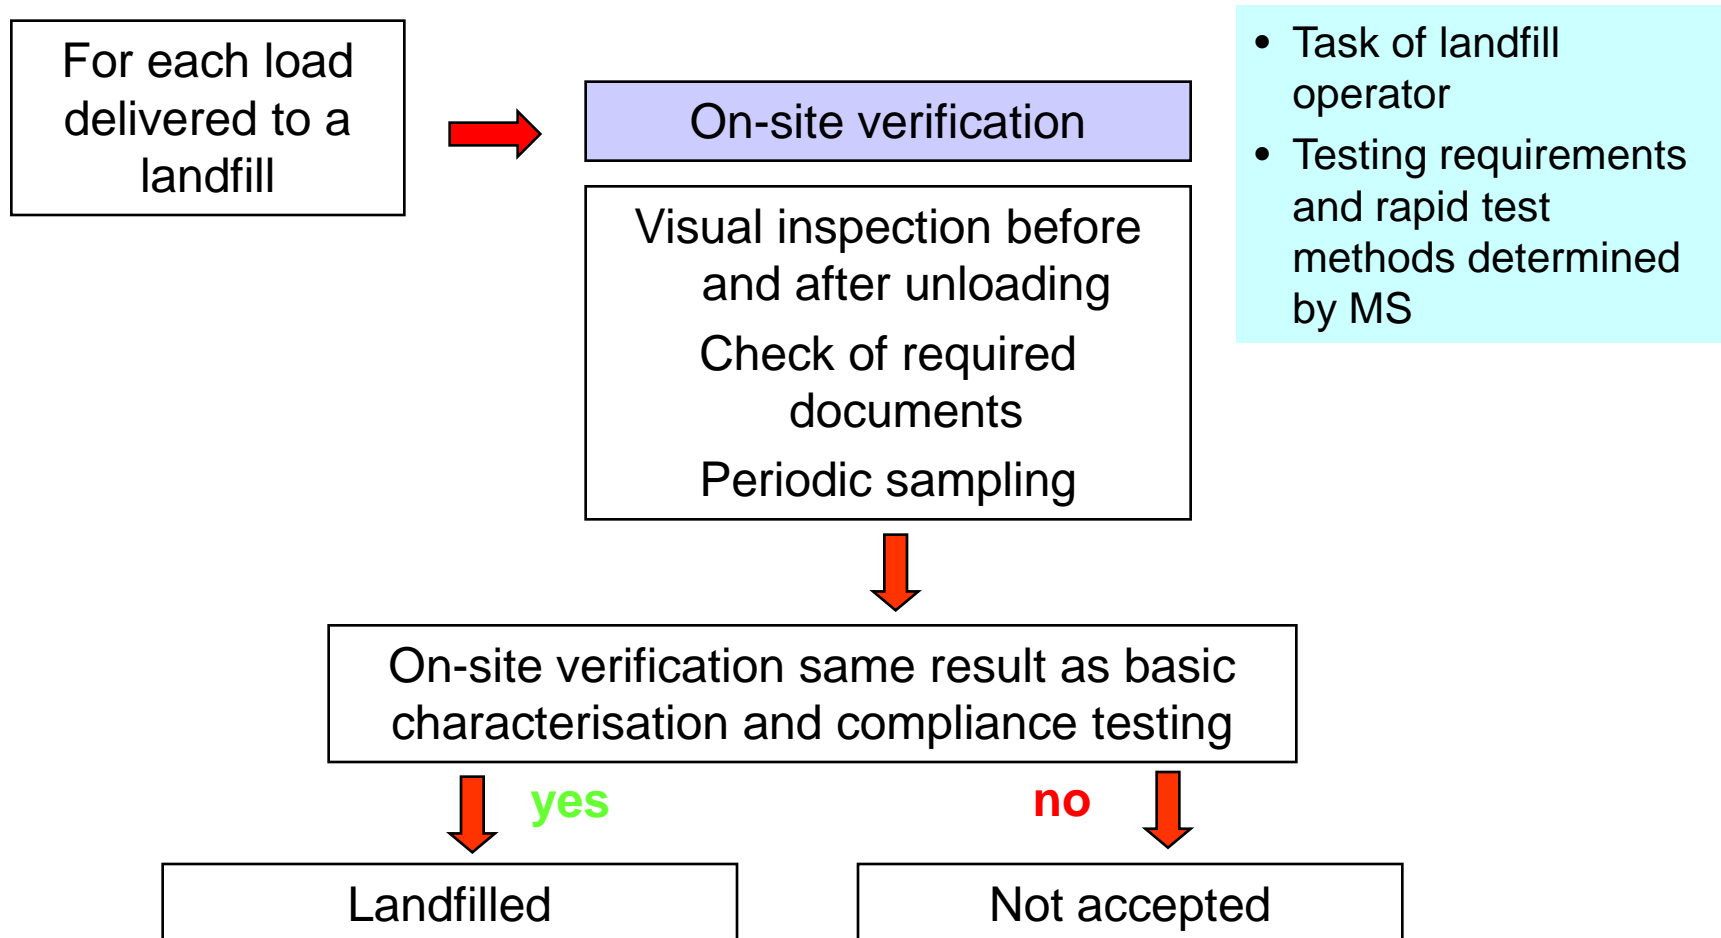



Acceptance procedure for underground landfills (class D)

Site specific safety assessment

- Geological assessment
- Geomechanical assessment
- Hydrogeological assessment
- Geochemical assessment
- Biosphere impact assessment
- Assessment of the operational phase
- Long-term assessment
- Assessment of the impact of all the surface facilities at the site

Excluded from landfill:

wastes that may undergo undesired physical, chemical or biological transformation after they have been deposited



Testing requirements for inert waste landfill (class A)

Acceptable without testing:

Single waste streams (list) that are assumed to fulfil the criteria including:

Glass (101103, 150107, 170202, 191205, 200102)

Concrete (170101, 170107 selected only)

Bricks (170102, 170107 selected only)

Tiles and ceramics (170103, 170107 selected only)

Soil and stones (17050, 200202 selected only)

All other wastes have to be tested
(chemical analysis)
prior to be accepted

Testing requirements for inert waste landfill (class 0)

- Leaching limit values: heavy metals, acids, phenol index, DOC, TDS
eg:

Component	L/S = 2 l/kg	L/S = 10 l/kg	C _o (percolation test)
	mg/kg dry substance	mg/kg dry substance	mg/l
Pb	0,2	0,5	0,15
DOC	240	500	160

- Limit values for total content of organic parameters: TOC, BTEX, PCB, mineral oil and PAHs, eg:

Component	Value mg/kg
TOC (total organic carbon)	30 000
PCBs (polychlorinated biphenyls 7 congeners)	1



Testing requirements for non-hazardous waste landfill (class B) - I

Acceptable without testing:

- Municipal waste (household, similar to household) that is classified as non-hazardous in EWC (20)
- Separately collected non-hazardous fractions of household or same material from other origin

These wastes may not be admitted to class B landfills:

- if not subjected to prior treatment or
- if contaminated to an extent which increases the associated risk sufficiently to justify disposal in other facilities

- Construction material containing asbestos and other suitable asbestos waste (if stable & non-reactive, no other hazardous substances, not with biodegradable, separate cell, daily coverage, final topping)

All other wastes have to be tested
prior to be accepted



Testing requirements for non-hazardous waste landfill (class B) - II

<p>Granular non-hazardous waste accepted in same cell as stable non-reactive hazardous waste</p>	<p>Non-hazardous gypsum waste (only in cells where no biodegradable waste is accepted)</p>	<p>Granular hazardous waste acceptable at class B landfills</p>
<p>Limit values</p>	<p>Limit values for wastes to be landfilled together with gypsum-based material</p>	<p>Leaching limit values</p>
<p>Heavy metals, chloride, fluoride, sulphate, DOC, TDS (alternative to sulphate, chloride)</p>	<p>TOC 5% DOC 800 mg/kg d.m.</p>	<p>Heavy metals, chloride, fluoride, sulphate, DOC, TDS (alternative to sulphate, chloride)</p>



Testing requirements for non-hazardous waste landfill (class B) - III

- Leaching limit values for heavy metals, acids, DOC and TDS, eg (granular waste)

Component	L/S = 2 l/kg	L/S = 10 l/kg	C _o (percolation test)
	mg/kg dry substance	mg/kg dry substance	mg/l
Pb	5	10	3
DOC	380	800	250

- Additional criteria for stable, non-reactive hazardous waste: TOC, pH, ANC
- For monolithic waste MS shall set criteria

Member States may create subcategories of landfills for non hazardous waste



Testing requirements for hazardous waste landfill (class C)

- All wastes have to be tested prior to acceptance
- Leaching limit values for heavy metals, acids, DOC and TDS, eg (granular waste)

Component	L/S = 2 l/kg	L/S = 10 l/kg	C _o (percolation test)
	mg/kg dry substance	mg/kg dry substance	mg/l
Pb	25	50	15
DOC	480	1 000	320

- Additional criteria: LOI or TOC, ANC
- For monolithic waste MS shall set criteria




Testing requirements for underground landfills (class D)

Inert waste → limit values according to landfill for inert waste

Non-hazardous waste → limit values according to landfill for non-hazardous waste

Hazardous waste → waste compatible with site-specific safety assessment

Decision 2003/33/EC – Sampling and test methods

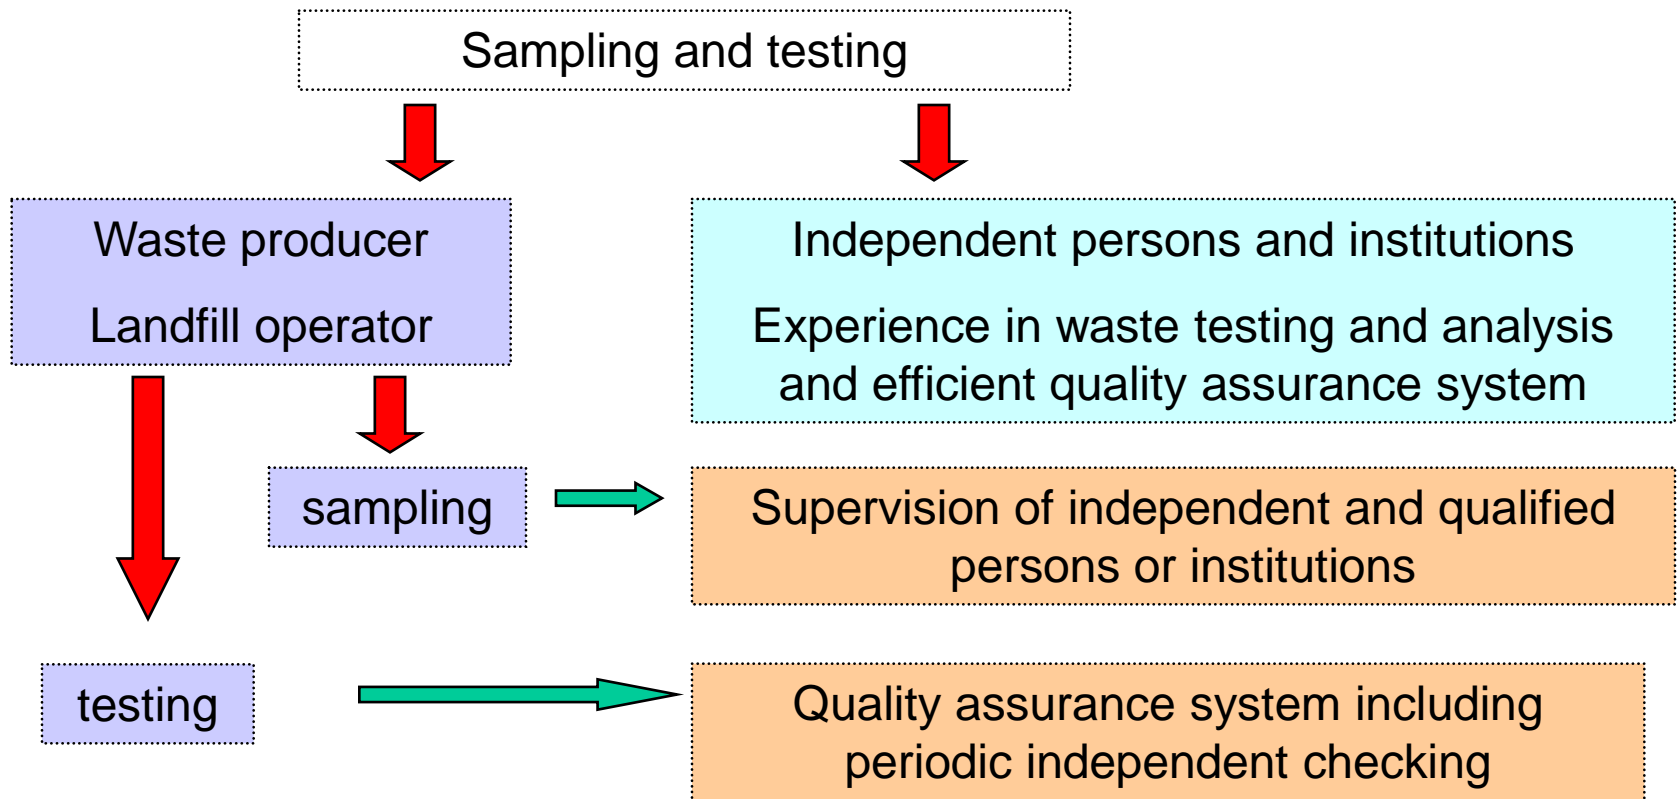

Sampling and testing according to methods listed in Annex III of Decision 2003/33/EC (developed by CEN)



Decision 2003/33/EC – Sampling and test methods

- **EN 14899: Framework for the application and preparation of a Sampling Plan**

-
- EN 123137: Determination TOC
 - EN 14429: Determination DOC
 - prEN 14405, EN 12457/1-4 : Leaching
 - prEN 14346: Calculation dry matter
 - EN 13657, EN 13656: digestion of raw waste
 - ENV 12506, ENV 13370, prEN 14039: analysis
- etc.



Problems and Deficits in Implementation of EN 14899

- (1) What sampling regime is needed to reliably assess characteristics and variability of a waste stream?
- (2) How is it possible to generate a sample representative for a certain period of time?
- (3) How to manage aspects of storage until test result are available?



High uncertainty
Cost and feasibility aspects
Diverging interpretation





Joint actions & constructive discussions



- Meetings at local, regional, national level
- TAC meetings
- IMPEL Working Group



IMPEL Cluster 1 – “Comparison programme for landfill inspection and monitoring”

- Support Member States for a consistent level of enforcement;
- Set up exchange of information, knowledge and practical experiences
- Provide an easily accessible EU enforcement project for all Member States;
- Create an informal network of inspectors
- Improve collaboration between the different competent authorities and enforcement partners.

Lead country: Austria

Project start January 2008

Project Manager

Mr Mag. Franz Mochty e-mail: Franz.Mochty@Lebensministerium.at

Ministry of Agriculture, Forestry, Environment and Water Management



Aspects to discuss

1. How do you perform basic characterisation for inert, municipal and hazardous waste?
2. How is compliance testing assured?
3. How is on-site verification performed?
4. Where are difficulties encountered?
5. What solutions have been developed?

